


MTVS/MTRS

2- and 3-way control valves

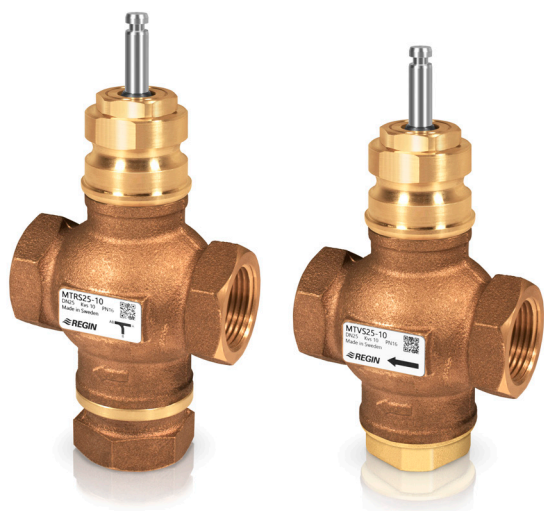


The MTVS and MTRS range of valves are intended for use in heating and ventilation systems. They are also highly suitable for systems where dezincification resistant materials is a requirement. The valves are intended for use with Regin's RVAN actuators.

- ✓ Size DN15–DN50
- ✓ Kvs value 0.63...39
- ✓ Rangeability 100:1
- ✓ Media temperature -5...+150°C
- ✓ For use in heating and ventilation systems
- ✓ Pressure class PN16

Function

2-way valve


The valve is open when the stem is in its lowest position and closed when the stem is in its top position.



2-way valve

3-way valve


The 3-way valve is closed between port A and port AB (the ports opposite to one another) when the stem is in its highest position. In this position, the valve is also open between the bottom port B and the common supply port AB. When the stem is in its lowest position, the 3-way valve is completely open between port A and port AB and consequently closed between the bottom port B and the common port AB.



3-way valve

Flow characteristics

The flow characteristic of the valve is equal percentage, in accordance with the figure below.

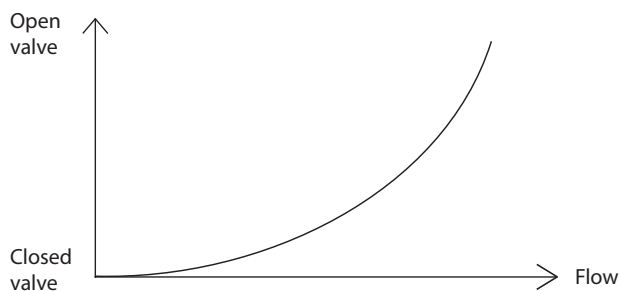


Installation

The 2-way valve should be mounted with port A on the inlet and port AB on the return (flow direction A in, AB out) to ensure that the plug closes tightly and to prevent any noise when closing.

The 3-way valve is of a mixing type and must therefore be mounted in the mixing point.

- Before installation of the control valve, ensure that the pipe is clean. Make sure that pipe scale, metal chips, welding slag and other foreign materials are removed.
- For maximum efficiency and minimum wear, install the valve in a vertical position with the stem pointing upward. If the valve is mounted with the actuator on the side, more wear is caused to the valve stuffing box. The valve should never be mounted at an angle of more than 90°.



- Install the valve according to the fluid direction arrow shown on the valve.
- Make sure there is ample space above the valve to facilitate easy removal of the valve actuator.

Fit a strainer/filter upstream of the valve to prolong the equipment's life span.

A water quality according to VDI 2035 is recommended.

Technical data

Application	Heating, cooling, ventilation systems and systems requiring DZR-materials
Nominal pressure rating	PN16
Connection	BSP female threading according to ISO 228/1
Flow characteristics	Equal percentage
Max. leakage	0,1 % of Kvs
Media	Hot, cold or glycol-mixed water (max. 50 % glycol)
Media temperature	-5...+150 °C
Rangeability	100:1
Stroke	20 mm

Material

Body	Gunmetal 1400 LG2
Valve seat	Gunmetal 1400 LG2
Cone	Gunmetal 1400 LG2
Stem	Stainless steel 303S31
Packing box	Dezincification resistant brass CW 602N
O-rings	EPDM

2-way valves

Article	Nominal diameter	Connection	Kvs
MTVS15-0,63	DN15	G½"	0,63
MTVS15-1,0	DN15	G½"	1,0
MTVS15-1,6	DN15	G½"	1,6
MTVS15-2,1	DN15	G½"	2,1
MTVS15-2,7	DN15	G½"	2,7
MTVS20-4,2	DN20	G¾"	4,2
MTVS20-5,6	DN20	G¾"	5,6
MTVS25-10	DN25	G1"	10
MTVS32-16	DN32	G1¼"	16
MTVS40-27	DN40	G1½"	27
MTVS50-39	DN50	G2"	39

3-way valves

Article	Nominal diameter	Connection	Kvs
MTRS15-0,63	DN15	G½"	0,63
MTRS15-1,0	DN15	G½"	1,0
MTRS15-1,6	DN15	G½"	1,6
MTRS15-2,1	DN15	G½"	2,1
MTRS15-2,7	DN15	G½"	2,7
MTRS20-4,2	DN20	G¾"	4,2
MTRS20-5,6	DN20	G¾"	5,6
MTRS25-10	DN25	G1"	10
MTRS32-16	DN32	G1¼"	16
MTRS40-27	DN40	G1½"	27
MTRS50-39	DN50	G2"	39


Combination options (valves and actuators) and differential pressure

Type	ΔP_s (RVAN5...)	ΔP_{max} (RVAN5...)	ΔP_s (RVAN10...)	ΔP_{max} (RVAN10...)
MTVS15-0,63	1600 kPa	700 kPa	1600 kPa	700 kPa
MTVS15-1,0	1600 kPa	700 kPa	1600 kPa	700 kPa
MTVS15-1,6	1600 kPa	700 kPa	1600 kPa	700 kPa
MTVS15-2,1	1600 kPa	700 kPa	1600 kPa	700 kPa
MTVS15-2,7	1600 kPa	700 kPa	1600 kPa	700 kPa
MTVS20-4,2	1000 kPa	600 kPa	1600 kPa	600 kPa
MTVS20-5,6	1000 kPa	600 kPa	1600 kPa	600 kPa
MTVS25-10	600 kPa	500 kPa	1400 kPa	500 kPa
MTVS32-16	400 kPa	400 kPa	800 kPa	450 kPa
MTVS40-27	300 kPa	300 kPa	600 kPa	400 kPa
MTVS50-39	200 kPa	200 kPa	400 kPa	300 kPa
MTRS15-0,63	1600 kPa	700 kPa	1600 kPa	700 kPa
MTRS15-1,0	1600 kPa	700 kPa	1600 kPa	700 kPa
MTRS15-1,6	1600 kPa	700 kPa	1600 kPa	700 kPa
MTRS15-2,1	1600 kPa	700 kPa	1600 kPa	700 kPa
MTRS15-2,7	1600 kPa	700 kPa	1600 kPa	700 kPa
MTRS20-4,2	1000 kPa	600 kPa	1600 kPa	600 kPa
MTRS20-5,6	1000 kPa	600 kPa	1600 kPa	600 kPa
MTRS25-10	600 kPa	500 kPa	1400 kPa	500 kPa
MTRS32-16	400 kPa	400 kPa	800 kPa	450 kPa
MTRS40-27	300 kPa	300 kPa	600 kPa	400 kPa
MTRS50-39	200 kPa	200 kPa	400 kPa	300 kPa

ΔP_s constitutes the max. permitted differential pressure at which the valve actuator can safely close against the pressure.

ΔP_{max} constitutes the max. permitted differential pressure over the flow path of the valve for the entire actuating range of the actuator (i.e. open valve).

Dimensions

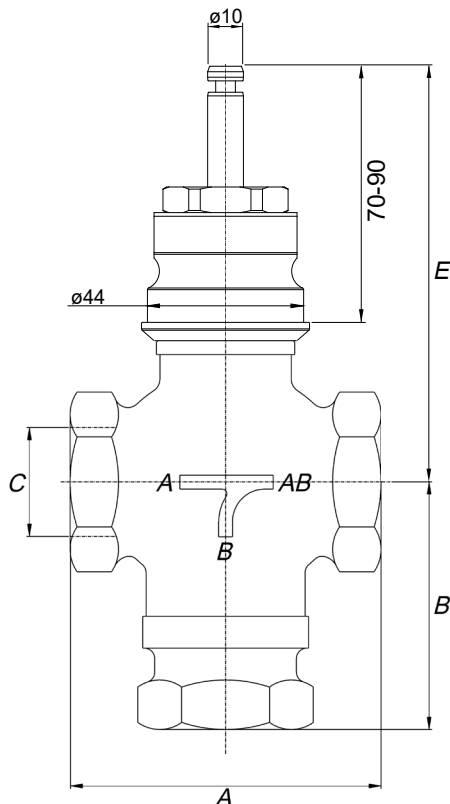

Model	A	B1	B2	C	E
MT...S15-0,63	70	51	70	G $\frac{1}{2}$ "	110
MT...S15-1,0	70	51	70	G $\frac{1}{2}$ "	110
MT...S15-1,6	70	51	70	G $\frac{1}{2}$ "	110
MT...S15-2,1	70	51	70	G $\frac{1}{2}$ "	110
MT...S15-2,7	70	51	70	G $\frac{1}{2}$ "	110
MT...S20-4,2	80	53	70	G $\frac{3}{4}$ "	110
MT...S20-5,6	80	53	70	G $\frac{3}{4}$ "	110
MT...S25-10	90	54	70	G1"	115
MT...S32-16	115	56	80	G1 $\frac{1}{4}$ "	119
MT...S40-27	130	69	80	G1 $\frac{1}{2}$ "	124
MT...S50-39	160	73	95	G2"	134


Measurements in mm unless otherwise specified.

The measurement B1 applies to MTSV.

The measurement B2 applies to MTRS.

Pressure loss diagram

Pressure drop

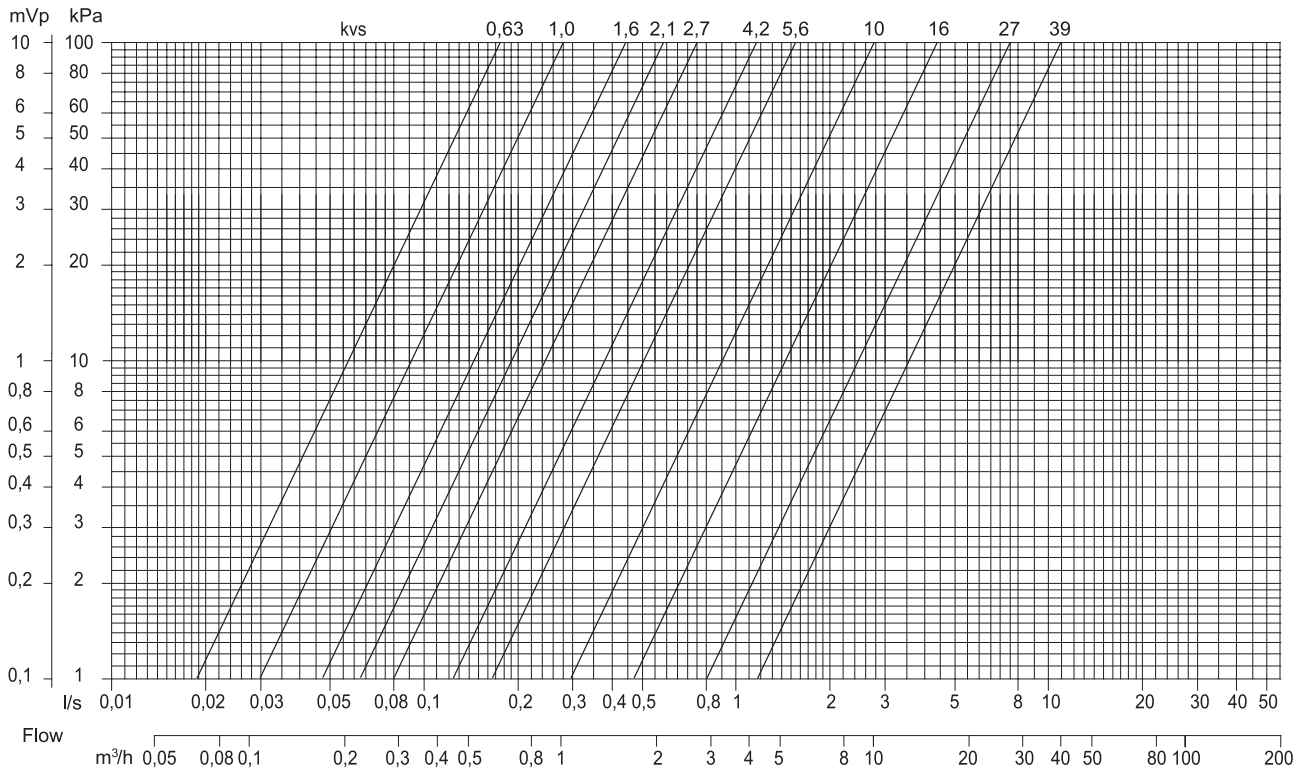

Example: Calculation of the Kv value

At a pressure drop of 6 kPa (A) and a flow of 10 m³ / h (B), the Kv value is 39 (C). See the markings in the picture on the right.

