



# CTHR2A(-D)

## CO<sub>2</sub>, humidity and temperature transmitters

A range of room transmitters for measuring carbon dioxide concentration in indoor environments. The transmitter has a built-in CO<sub>2</sub> sensor with output signal 0...10 V, a 0...10 V output signal for temperature, as well as a 0...10 V output signal for relative humidity.

Transmitters with automatic calibration combining measurement of CO<sub>2</sub> level, temperature and relative humidity in the same casing. The sensors are mounted in the cover-part of the casing. The cover is easy to detach from the back by means of snap-in grips and detachable terminals. This makes mounting easier. Furthermore, no cables have to be disconnected, simplifying service and replacement.

The transmitters are intended for wall mounting in HVAC systems.

### CO<sub>2</sub> sensor

The CO<sub>2</sub> concentration is measured using infrared light, a technique that measures the absorption in gases. It has a reference measuring system that compensates values in relation to changes in light intensity. This technique has many advantages:

- Very high accuracy
- Exact identification of the detected gas
- Low risk of contamination
- Short response time
- Excellent long-term stability

### Automatic calibration

The transmitters have automatic calibration, which means that manual recalibration is not required during the lifetime of the transmitter.

### Temperature sensor

The unit has a built-in temperature sensor which provides a 0...10 V signal in the range 0...50°C.

### Relative humidity

The transmitters have a capacitive thin-film element that provides a 0...10 V signal proportional to the relative humidity in the range 0...100 % RH.

The measuring element responds quickly to changes in humidity and has excellent long-term stability.

### Short facts about CTHR2A(-D)

- Output signal CO<sub>2</sub>, 0...10 V DC referring to 0...2000 ppm
- Output signal temperature, 0...10 V DC referring to 0...50°C
- Output signal humidity, 0...10 V DC referring to 0...100 % RH
- CO<sub>2</sub> concentration, 0...2000 ppm
- Temperature, 0...50°C
- Humidity, 10...90 % RH
- Good long-term stability

### Supply voltage

The transmitter uses a supply voltage of 24 V AC ±10 %, 50...60 Hz or 15...35 V DC. It automatically detects and adapts to the supply voltage connected.

### Display (-D models)

Display models have an LCD display showing carbon dioxide concentration, temperature and humidity in an alternating series.

### Applications

The carbon dioxide level gives a direct indication of the indoor air quality. This information can be used to control ventilation with high precision and improve the air quality. By increasing the supply air only when necessary, it is possible to minimise energy costs.

The transmitter is especially suited for environments such as cinemas, schools, hospitals, conference rooms, assembly halls, etc.

## Models

| Model    | Description   |
|----------|---|
| CTHR2A   | CO <sub>2</sub> , humidity and temperature transmitter              |
| CTHR2A-D | CO <sub>2</sub> , humidity and temperature transmitter with display |

## Technical data

|                       |   |
|-----------------------|---|
| Supply voltage        | 24 V AC $\pm$ 10 %, 50...60 Hz or 15...35 V DC    |
| Power consumption     | < 2.5 W   |
| Energy consumption    | < 0.5 Wh  |
| Transformer power     | 5 VA  |
| Electrical connection | Screw terminals max. 1.5 mm <sup>2</sup> (AWG 16) |
| Ambient temperature   | 0...50°C  |
| Ambient humidity      | 10...90 % RH non-condensing                       |
| Storage temperature   | -25...+60°C                                       |
| Protection class      | IP30  |
| Dimensions (WxHxD)    | 85 x 100 x 30.5 mm                                |

### CO<sub>2</sub>

|                               |  |
|-------------------------------|--|
| Output signal CO <sub>2</sub> | 0...10 V DC referring to 0...2000 ppm        |
| Working range                 | 0...2000 ppm                                 |
| Accuracy at 20°C              | < $\pm$ (50 ppm + 2 % of the measured value) |
| Temperature dependance        | Typically 5 ppm / K                          |
| Long-term stability           | Typically 20 ppm / year                      |
| Time constant                 | < 90 s                                       |
| Warmup time                   | < 5 min                                      |

### Temperature

|                           |                                   |
|---------------------------|-----------------------------------|
| Output signal temperature | 0...10 V DC referring to 0...50°C |
| Measuring range           | 0...50°C                          |
| Accuracy                  | $\pm$ 0.4°C                       |

### Humidity


|                        |                                       |
|------------------------|---------------------------------------|
| Output signal humidity | 0...10 V DC referring to 0...100 % RH |
| Working range          | 10...90 % RH                          |
| Accuracy at 20°C       | $\pm$ 3 %                             |




**EMC emissions & immunity standards:** This product conforms to the requirements of the EMC Directive 2004/108/EC through product standards EN 61000-6-1 and EN 61000-6-3.

**RoHS:** This product conforms to the Directive 2011/65/EU of the European Parliament and of the Council.

## Wiring and dimensions

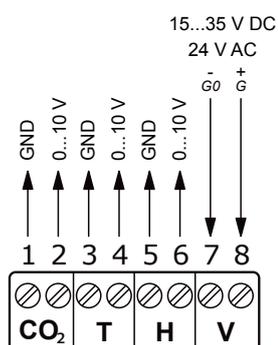

GND and G0 are internally connected.

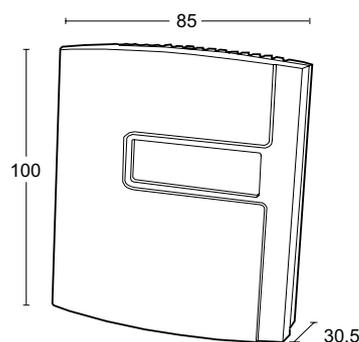

(Measurements in mm.)

## Product documentation

| Document        | Type                                  |
|-----------------|---------------------------------------|
| CTHR2A(-D)_inst | Instruction for the transmitter range |

The document can be downloaded from [www.regincontrols.com](http://www.regincontrols.com).

### Head office Sweden

Phone: +46 31 720 02 00

Web: [www.regincontrols.com](http://www.regincontrols.com)

Mail: [info@regin.se](mailto:info@regin.se)



THE CHALLENGER IN BUILDING AUTOMATION