



- Can be used for Corrigo E or EXOcompact
- 4 row backlit LCD display
- User-friendly key-pad

E-DSP is an independent display and configuration unit for EXOcompact or Corrigo E. It can be mounted on a wall or on a device box (cc 60 mm).

Models



E-DSP is available in two models:

- E-DSP-3, delivered with 3 m connection cable
- E-DSP-10, delivered with 10 m connection cable


Display

E-DSP has a background lit display with 4 rows, 20 characters a row. The display lighting is normally off, but is activated when a button is pushed. The lighting is automatically turned off after a period of inactivity.

There are two LEDs on the front:

- The alarm LED is marked with a  symbol
- The "write enable" LED is marked with a  symbol

The display menu system is accessed using seven buttons:

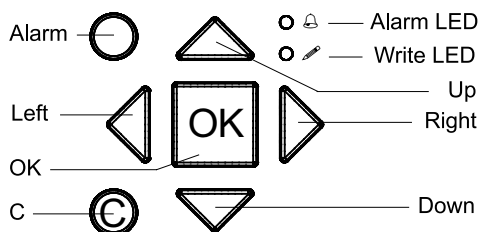

E-DSP



External display unit

External display unit for use with Corrigo E or EXOcompact models without internal display and buttons. E-DSP is used to give full control access to controllers mounted inside a cabinet etc.

- Casing designed for wall mounting, mounting on a device box or mounting on the front of a cabinet
- Protection class IP40

LEDs

The LEDs have the following functions:

Designation	Function	Colour
	There are one or more unacknowledged alarm(s)	Flashing red
	There are one or more remaining, acknowledged alarm	Fixed red
	You are in a dialog box where it is possible to switch to change mode	Flashing yellow
	Change mode	Fixed yellow

Cables

E-DSP is delivered with a permanently connected cable which is connected to Corrigo E or EXOcompact with a modular connector.

If the cable is detached from the control unit, it should be reconnected according to the wiring diagram on the back of the unit.

A cable longer than 10 m cannot be used.

Models

- E-DSP-3 Including 3 m connection cable
 E-DSP-10 Including 10 m connection cable

Technical data


Protection class	IP30
Power supply	internal via communication cable from EXOcompact or Corrigo E
Connection cable	3 or 10 m with RJ12 fast connector to EXOcompact or Corrigo E
Display	backlit, LCD, 4 rows with 20 characters
Character height	4.75 mm



EMC emission and immunity standard: This product conforms to the requirements of the EMC Directive 2004/108/EC through product standards EN 61000-6-1 and EN 61000-6-3.

RoHS: This product conforms to the Directive 2011/65/EU of the European Parliament and of the Council.

Dimensions

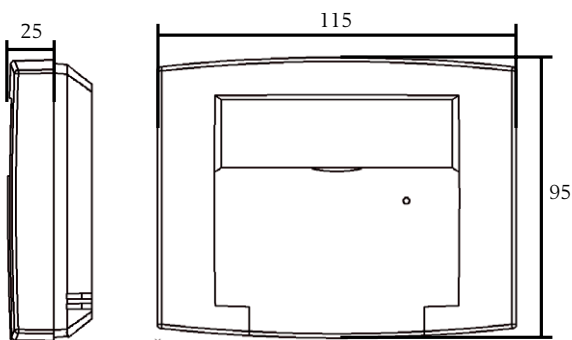

Measurements in mm.