


Beispiel 002

Funktionsbeschreibung: Gemischter Heizkreis 1 (stetig), Gemischter Heizkreis 2 (stetig)

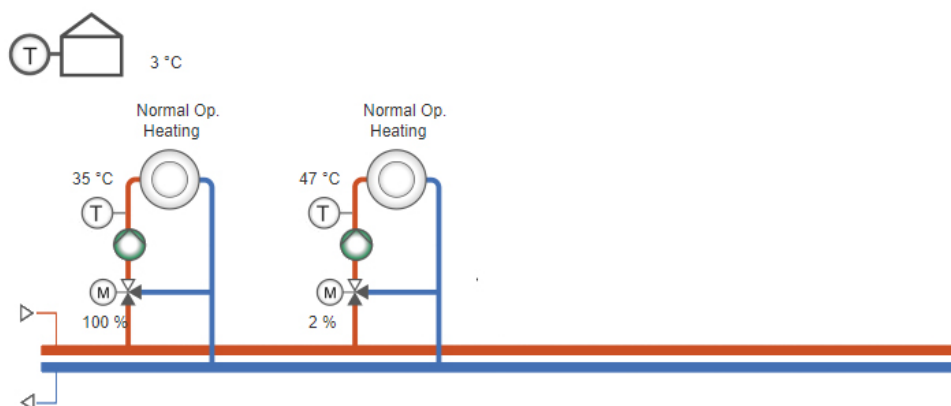

	G	1	G	50	P1 B	
	G0	2	G0	51	P1 A	
	GND	3	24V AC/DC	52	P1 N	
	+C	4	+C	53	P1 E	
	GDO	10	GDO	60	P2 B	
HK1, Pumpe A	DO1	11	DO1	61	P2 A	
HK2, Pumpe A	DO2	12	DO2	62	P2 N	
	DO3	13	DO3	63	P2 E	
	DO4	14	DO4			
	DO5	15	DO5			
	DO6	16	DO6			
	DO7	17	DO7			
	Agnd	30	Agnd			
	AI1	31	AI1			
Außentemperatur	AI1	32	AI2			
HK1, Vorlauftemp.	AI2	33	Agnd			
	Agnd	34	AI3			
HK2, Vorlauftemp.	AI3	35	AI4			
	AI4	40	Agnd			
	Agnd	41	UI1 :AI5/DI9			
	UI1	42	UI2 :AI6/DI10			
	UI2	43	Agnd			
	Agnd	44	UI3 :AI7/DI11			
	UI3	45	UI4 :AI8/DI12			
	UI4					
	TCP					

Klemmenanschluss

Verfügbar für: HCA152W-4, HCA152DW-4, HCA282DW-4, HCA283WM-4, HCA283DWM-4

Application Tool – Datei: 002_HCAxxxxx_HSco_HSco