


## Exempel 002

Funktionsbeskrivning: Blandad värmekrets 1 (kontinuerlig), Blandad värmekrets 2 (kontinuerlig)

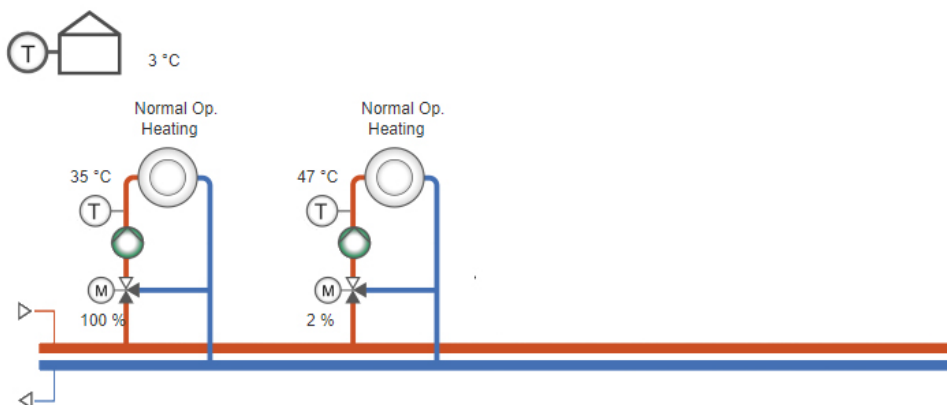

	G				
	G0				P1 B
	Gnd				P1 A
	+C				P1 N
	Gdo				P1 E
VS1 pump A	DO1	10	G D0		P2 B
VS2 pump A	DO2	11	DO1		P2 A
	DO3	12	DO2		P2 N
	DO4	13	DO3		P2 E
	DO5	14	DO4		
	DO6	15	DO5		Ext D
	DO7	16	DO6		
	Agnd	17	DO7		
	Agnd	30	Agnd		DI1
Utetemperatur	AI1	31	AI1		DI2
VS1 framledningstemp	AI2	32	AI2		DI3
	Agnd	33	Agnd		DI4
VS2 framledningstemp	AI3	34	AI3		DI5
	AI4	35	AI4		DI6
	Agnd	40	Agnd		DI7
	Agnd	41	UI1 :AI5/DI9		DI8
	UI1	42	UI2 :AI6/DI10		
	UI2	43	Agnd		Agnd
	Agnd	44	UI3 :AI7/DI11		AO1 VS1 Ventil
	UI3	45	UI4 :AI8/DI12		AO2 VS2 Ventil
	UI4				AO3
					AO4
					AO5
	TCP				

Plintanslutningar

Tillgänglig för: HCA152W-4, HCA152DW-4, HCA282DW-4, HCA283WM-4, HCA283DWM-4

Application tool-fil: 002\_HCAxxxxx\_HSco\_HSco