

# Presigo PDT...C (-2)



Differential pressure transmitter with communication for HVAC applications

*Transmitters with two universal inputs and communication via EXOline or Modbus*

- ✓ Uses a sensor technology that offers very high accuracy and excellent long-term stability
- ✓ Easy installation
- ✓ Expands the controller by up to four inputs
- ✓ Operating temperature -25...+50°C
- ✓ Can be mounted vertically or horizontally

## Function

Presigo PDT...C(-2) is a range of pressure transmitters with one or two pressure sensors, two universal inputs and an RS485 port for data exchange. The RS485 port can be easily configured for either EXOline or Modbus communication.

The transmitter is especially well suited as a distributed I/O module for air handling unit controllers. It is designed for easy installation together with Regin's Corrido or EXOcompact controllers.

Several different models are available (see table on page 2).

## Expands the controller by up to four inputs

The transmitter operates as a Modbus or EXOline slave, relieving the controller of up to two analogue pressure inputs and two universal inputs. This means that less wiring is required, reducing both material costs as well as the amount of work needed.

You can choose whether flow or volume data will be displayed. A single unit will usually cover half the measuring requirements of one typical air handling unit (fan, filter and two temperatures).

## Smart sensor technology

The transmitter has one or two MEMS dual-chip medical grade sensor modules for general use with neutral gases.

This technology offers very high accuracy and excellent long-term stability.

## Compact design and flexible universal inputs

The transmitter has a small and compact design which, depending on the model, contains one or two transmitters and two universal inputs in the same casing. The universal inputs can be individually configured as digital or analogue inputs (PT1000/Ni1000 sensor or 0...10 V).

## DIP-switch

The transmitter features a DIP-switch for setting up suitable communication parameters. These settings can later be overridden by commands sent by the master.

## Easy installation and wiring

The unit can be mounted either vertically or horizontally. If it is installed in a humid environment, vertical mounting is recommended to allow moisture to escape.

Two separate cable inlets, a large angled terminal and generous space make wiring easy.

## Flow settings

Unit	Flow ranges (full scale)
l/s	0...31000
m <sup>3</sup> /h (factory setting)	0...65000
CFM [Ft <sup>3</sup> /min]	0...65000

## Universal inputs UI1, UI2

Configured as	Ambient temperature	Accuracy	Range
PT1000 <sup>1</sup>	-25...0°C	±1 K	-40...+60°C or -40...+140°F
	0...50°C	±0.5 K	
Ni1000; 6180 ppm/K	-25...0°C	±1 K	-40...+60°C or -40...+140°F
	0...50°C	±0.5 K	
0...10 V	-	± 1 % at 20°C	-
Digital input	Potential-free contacts on/off (closed=on)		

1. *Factory setting*

## Technical data

<b>Supply voltage</b>	24 V AC/DC $\pm 15\%$
<b>Protection class</b>	IP54
<b>Calculated power consumption</b>	2 VA (rms). Minimum transformer size 7.5 VA
<b>Data transmission channel</b>	Non-isolated RS485 (max. 100 m)
<b>Overall accuracy, pressure</b>	$\leq 1\%$ full scale
<b>Annual deviation (typical)</b>	
<i>P1250 models</i>	$\pm 2$ Pa
<i>P2500 model</i>	$\pm 4$ Pa
<i>P7500 models</i>	$\pm 20$ Pa
<b>Damping (settable)</b>	1...12 s
<b>K-factor (settable)</b>	5...700
<b>Operating temperature range</b>	-25...+50°C*
<b>Operating humidity</b>	Max. 95 % RH (non-condensing)
<b>Accessories, included</b>	Two pressure outlets (straight) and 2 m plastic tube. Art. no.: ANS-20
<b>Oversupply on any terminal</b>	Max. $\pm 18$ V (referenced to GND)

## Pressure data

<b>Media</b>	Air, non-flammable and non-aggressive gas
--------------	---



This product carries the CE-mark. More information is available at [www.regincontrols.com](http://www.regincontrols.com).

## Material

<b>Material, housing</b>	Polycarbonate (PC)
<b>Material, base</b>	Polycarbonate (PC)
<b>Material, cable gland</b>	Thermoplastic elastomer (TPS-SEBS)
<b>Material, gasket</b>	Ethylene Propylene Diene Monomer (EPDM)

## Models with pressure ranges (full scale)

<b>Model</b>		<b>Number of sensors</b>	<b>Pressure range (Pa)</b>	<b>mBar</b>	<b>mmH<sub>2</sub>O</b>	<b>inH<sub>2</sub>O</b>
PDT12C	PS11	One (only PS1 is present, reading PS2 related parameters will yield a zero value reading)	0...1250	0...12.5	0...125	0...5
PDT25C	PS1	One (only PS1 is present, reading PS2 related parameters will yield a zero value reading)	0...2500	0...25	0...250	0...10
PDT75C	PS1	One (only PS1 is present, reading PS2 related parameters will yield a zero value reading)	0...7500	0...75	0...750	0...30


Model		Number of sensors	Pressure range (Pa)	mBar	mmH <sub>2</sub> O	inH <sub>2</sub> O
PDT12C-2	PS1	Two	0...1250	0...12.5	0...125	0...5
	PS2		0...1250	0...12.5	0...125	0...5
PDT12S25C-2	PS1	Two	0...1250	0...12.5	0...125	0...5
	PS2		0...2500	0...25	0...250	0...10
PDT25C-2	PS1	Two	0...2500	0...25	0...250	0...10
	PS2		0...2500	0...25	0...250	0...10
PDT12S75C-2	PS1	Two	0...1250	0...12.5	0...125	0...5
	PS2		0...7500	0...75	0...750	0...30

1. PS = Pressure sensor


## Accessories

Article	Description
ANS-3	Metal pressure outlet with 90° angle, 2 pcs + 2 m plastic tubing
ANS-20	Pressure outlet (straight), 2 pcs + 2 m plastic tubing

## Dimensions

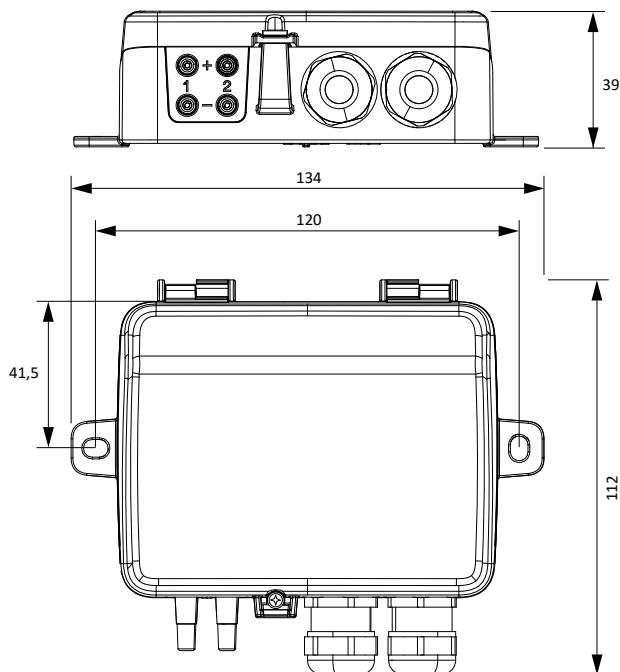

Dimensions, pressure outlets:

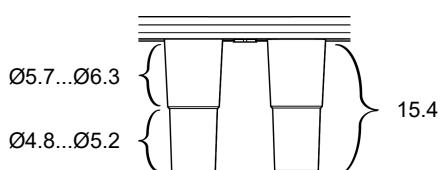

[mm]

## Wiring

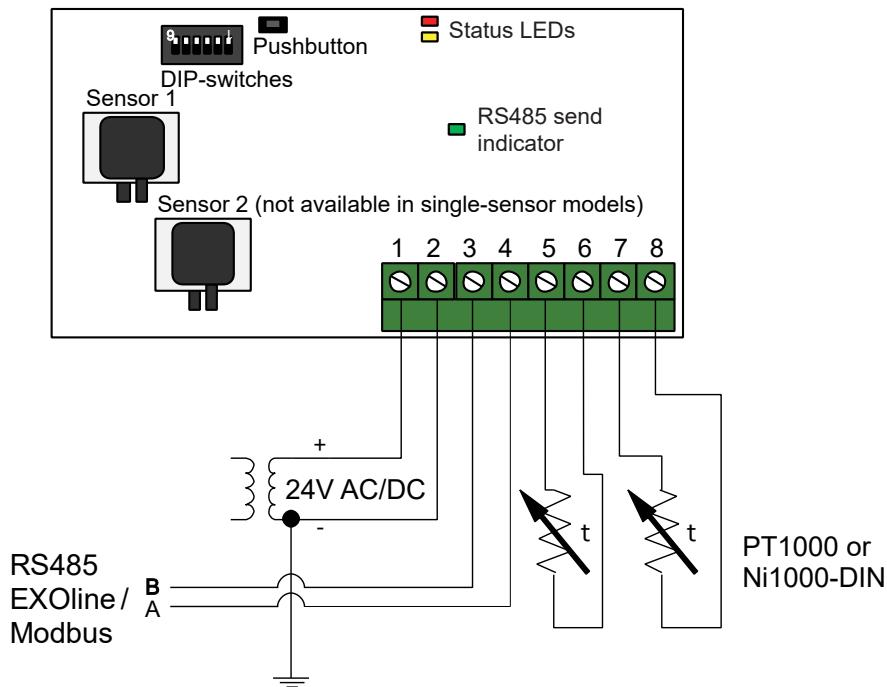


Fig. 1 Wiring with UIx as temperature input

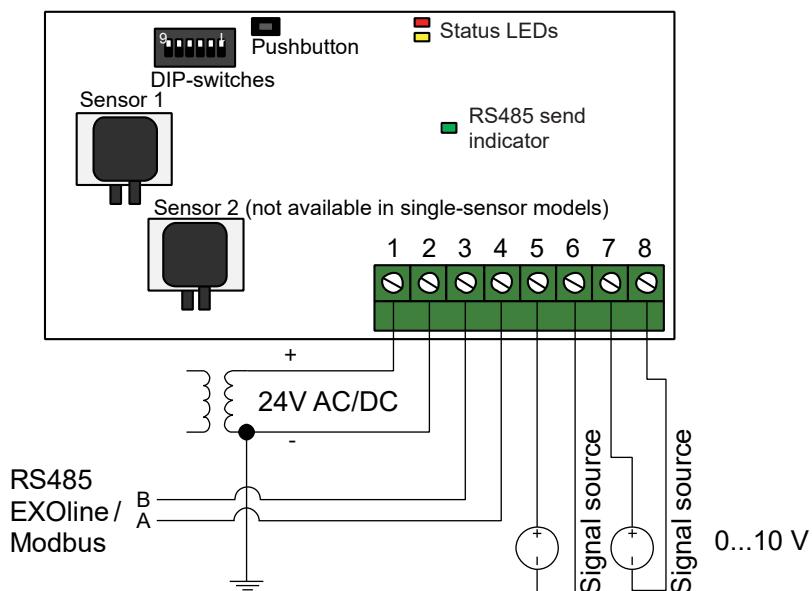


Fig. 2 Wiring with UIx as 0...10 V input

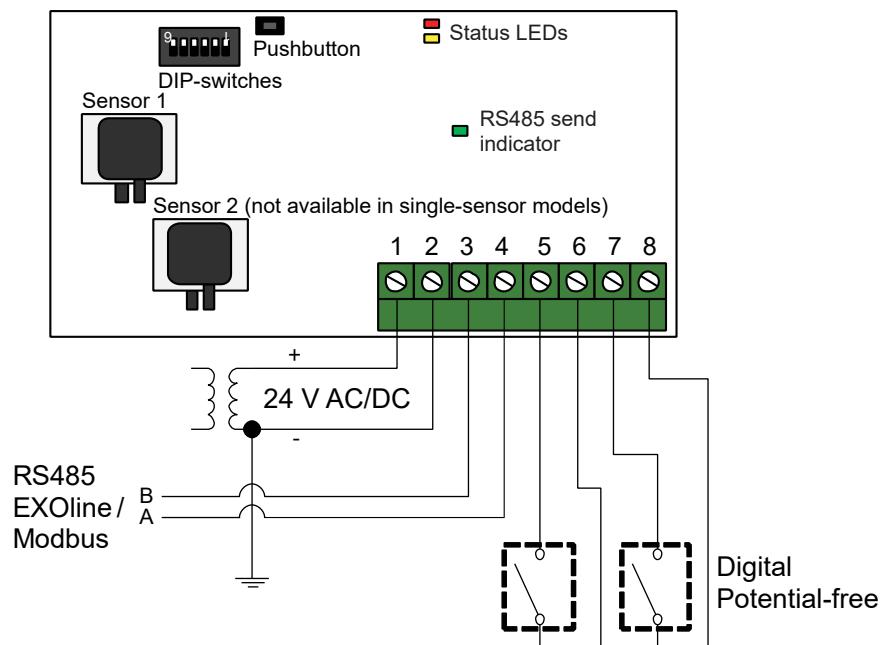


Fig. 3 Wiring with UIx as digital input

## Documentation

All documentation can be downloaded from [www.regincontrols.com](http://www.regincontrols.com).