



# TRAFO40N/D

Transformer, 40 VA

Safety isolating transformer intended for low voltage.

- 40 VA
- DIN-mounting
- Output voltage 12 V AC and 24 V AC

TRAFO40N/D is a transformer for DIN-mounting in a cabinet or other tight enclosure.

## Overload protection

TRAFO40N/D has a thermal overload protection that protects the transformer against overloading.

The protection will automatically reset if the supply voltage is disconnected. Let the protection cool off and remove possible faults before connecting the supply voltage again.

- Built-in overload protection
- Built-in fuse

## Applications

For supplying HVAC equipment, alarm set-ups, heating foil or cable, halogen lights and other low-voltage installations (supplying SELV and PELV devices).

## Technical data

Supply voltage (primary)  
Output voltage (secondary)

Power output  
Frequency  
Isolation voltage  
Type  
Temperature rating  
Max. ambient temperature  
Protection class




230 V AC  
12 V AC un stabilised  
24 V AC un stabilised  
40 VA (12 V / 3.3 A, 24 V / 1.67 A)  
50...60 Hz  
4 kV AC RMS  
Class II  
B (130°C)  
40°C  
IP20


This product conforms with the requirements of European EMC standard EN61558-2-6 and carries the CE mark.

**RoHS:** This product conforms to the Directive 2011/65/EU of the European Parliament and of the Council.

## Wiring

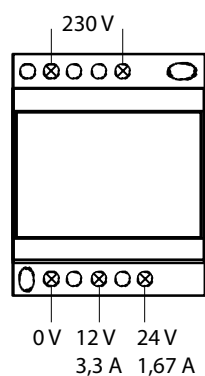

## Dimensions

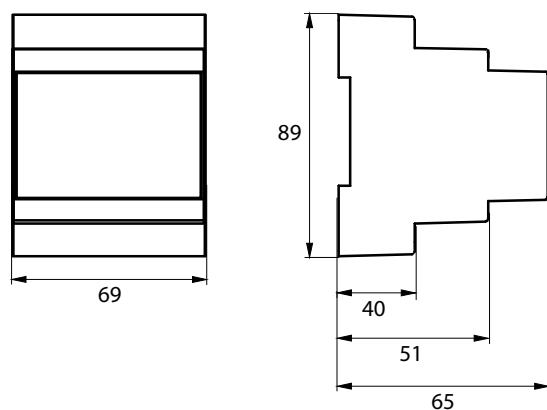

Measurements in mm.

### Head Office Sweden

Phone: +46 31 720 02 00

Web: [www.regincontrols.com](http://www.regincontrols.com)

Mail: [info@regin.se](mailto:info@regin.se)



THE CHALLENGER IN BUILDING AUTOMATION