



# TG-B1...

## Bulb sensor

Universal sensor. For use with the Aqualine-, TM- and TTC-series. N.B. This sensor cannot be used with the Pulser-series.


## Models

| Article number | Temperature range | Cable length |
|----------------|-------------------|--------------|
| TG-B110        | -20...+10°C       | 1.5 m        |
| TG-B130        | 0...30°C          | 1.5 m        |
| TG-B150        | 20...50°C         | 1.5 m        |
| TG-B150/2.5    | 20...50°C         | 2.5 m        |
| TG-B160        | 0...60°C          | 1.5 m        |
| TG-B170        | 40...70°C         | 1.5 m        |
| TG-B190        | 60...90°C         | 1.5 m        |

## Technical data

|                  |                     |
|------------------|---------------------|
| Sensor element   | NTC                 |
| Diameter         | Ø 6 mm              |
| Material         | Nickel plated brass |
| Protection class | IP65                |

## Dimensions (mm)

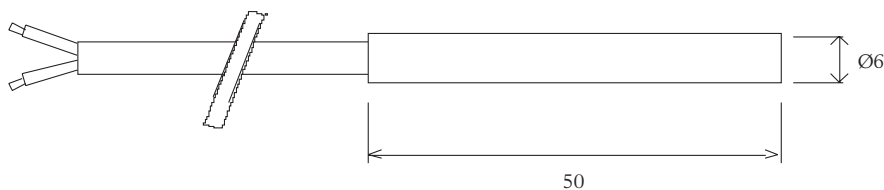

**Head Office Sweden**  
 Phone: +46 31 720 02 00  
 Web: [www.regin.se](http://www.regin.se)  
 Mail: [info@regin.se](mailto:info@regin.se)

**Sales Offices**  
 France: +33 1 41 71 00 34  
 Germany: +49 30 77 99 40  
 Spain: +34 91 473 27 65  
 Hong Kong: +852 24 07 02 81  
 Singapore: +65 67 47 82 33

**REGIN**

THE CHALLENGER IN BUILDING AUTOMATION